

Job Name:

System Reference:

Date:

208/230V OUTDOOR VRF HEAT PUMP SYSTEM**UNIT OPTION**
 Standard Model..... PUHY-P72TNU-A
 Seacoast (BS) Model..... PUHY-P72TNU-A-BS
ACCESSORIES
 Header Kit..... for details see Pipe Accessories Submittal
 Joint Kit..... for details see Pipe Accessories Submittal
 Low Ambient Kit..... for details see Low Ambient Kit Submittal
 Panel Heater Kit..... for details see Panel Heater Kit Submittal
 Snow/Hail Guards Kit..... for details see Snow/Hail Guards Kit Submittal

Specifications		System	
Unit Type		PUHY-P72TNU-A(-BS)	
Cooling Capacity (Nominal)		BTU/H	72,000
Heating Capacity (Nominal)		BTU/H	80,000
Guaranteed Operating Range ¹	Cooling ²	°F [°C]	23~126 [-5.0~52.0]
	Heating ³	°F [°C]	-4~60 [-20.0~15.5]
Extended Operating Range	Heating	°F [°C]	-18~60 [-28.0~15.5]
External Dimensions (H x W x D)		In. [mm]	71-10/16 x 36-4/16 x 29-3/16 [1,818 x 920 x 740]
Net Weight		Lbs. [kg]	479 [217]
External Finish			Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 3Y 7.8/1.1 or similar>
Electrical Power Requirements	Voltage, Phase, Hertz, Power Tolerance		208/230V, 3-phase, 60 Hz, ±10%
Minimum Circuit Ampacity		A	24.0/22.0
Maximum Overcurrent Protection		A	40/35
Recommended Fuse Size		A	30/30
Recommended Minimum Wire Size		AWG [mm]	10/10 [5.3/5.3]
SCCR		kA	5
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	3/8 [9.52] Brazed
	Gas (Low Pressure)	In. [mm]	7/8 [22.2] Brazed
Max. Total Refrigerant Line Length		Ft.	3280
Max. Refrigerant Line Length (Between ODU & IDU)		Ft.	541
Max. Control Wiring Length		Ft.	1640
Indoor Unit Connectable	Total Capacity		50.0~130.0% of outdoor unit capacity
	Model/Quantity		P05~P72/1.0~15.0
Sound Pressure Levels		dB(A)	55.0~57.5
Sound Power Levels		dB(A)	74.0/76.5
FAN ⁴	Type x Quantity		Propeller fan x 1
	Airflow Rate	CFM	6000
	External Static Pressure	In. WG	Selectable; 0.00, 0.12, 0.24, 0.32 In. WG; factory set to 0 In. WG
Compressor Operating Range			21.0% to 100.0%
Compressor	Type x Quantity		Inverter scroll hermetic compressor x 1
Refrigerant	Type x Original Charge		R410A x 14 lbs + 5.0 oz [6.5 kg]
Protection Devices	High Pressure Protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter Circuit (Comp./Fan)		Over-current protection
	Fan Motor		Over-current protection
AHRI Ratings (Ducted/Non-ducted)	EER		13.1/13.5
	IEER		24.8/31.5
	COP		3.97/4.34

NOTES:

Nominal cooling conditions (Test conditions are based on AHRI 1230)
 Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
 Nominal heating conditions (Test conditions are based on AHRI 1230)
 Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)

¹Harsh weather environments may demand performance enhancing equipment. Ask your Mitsubishi Electric representative for more details about your region

²For details on extended cooling operation range down to -10° F DB, see Low Ambient Kit Submittal

³When applying product below -4°F, consult your design engineer for cold climate application best practices, including the use of a backup source for heating

⁴Unit will continue to operate in extended operating range, but capacity is not guaranteed

OUTDOOR UNIT: PUHY-P72TNU-A(-BS) – DIMENSIONS


PUHY-P72TNU-A(-BS)

Unit: mm (in.)

Note 1. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications			
Model	Refrigerant pipe	Diameter	
		Liquid	Gas
P72	ø22.7(7/8)	ø22.7(7/8)	ø22.7(7/8)

NO.	Usage	Specifications
①	Front through hole	148(5-7/8) × 84(3-5/16) Knockout hole
②	Bottom through hole	150(5-15/16) × 94(3-3/4) Knockout hole
③	Front through hole	ø62.7(2-1/2) or ø34.5(1-3/8) Knockout hole
④	Front through hole	ø45.7(1-3/4) or ø22.7(7/8) Knockout hole
⑤	Bottom through hole	ø65(2-9/16) Knockout hole
⑥	Bottom through hole	ø52(2-1/16) Knockout hole
⑦	Front through hole	ø34(1-3/8) Knockout hole
⑧	Bottom through hole	ø34(1-3/8) Knockout hole

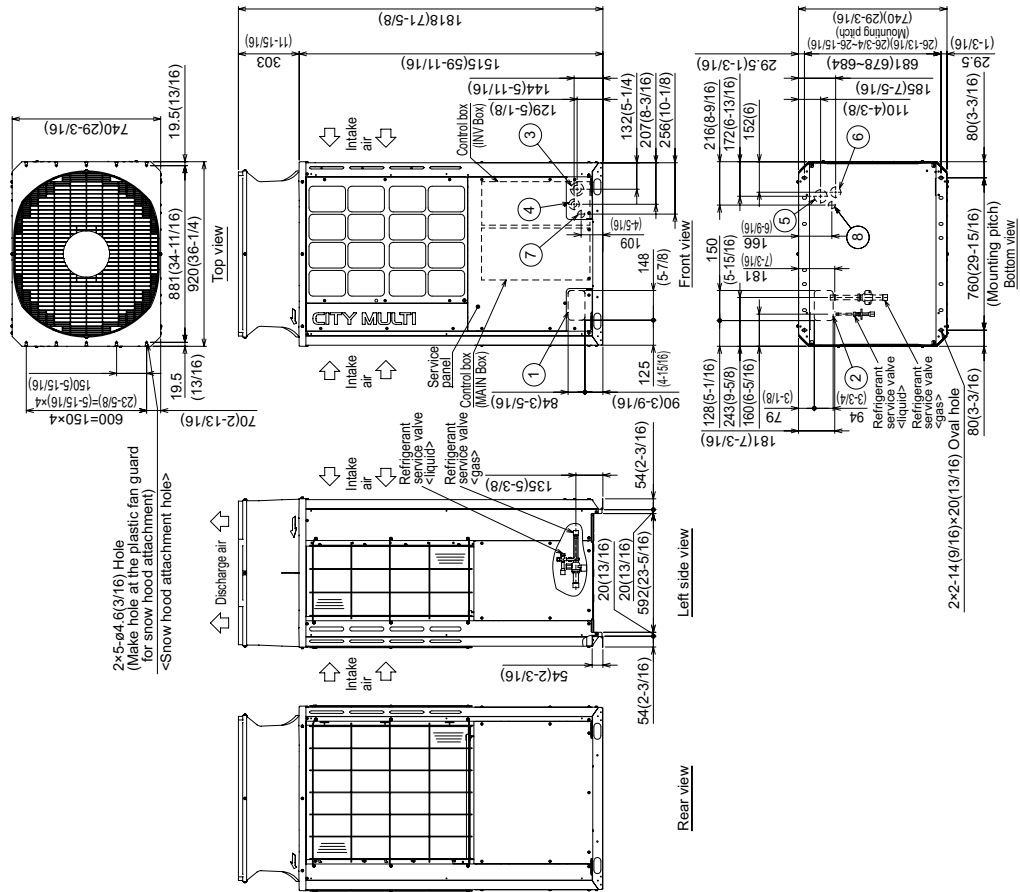

NOTES:
 SEACOAST PROTECTION
 Anti-corrosion Protection: A coating treatment is applied to condenser coil for protection from air contaminants.
 Standard: Salt Spray Test Method - no unusual rust development to 480 hours.
 Sea Coast (BS): Salt Spray Test Method (JRA 9002) - no unusual rust development to 960 hours.

1340 Satellite Boulevard Suwanee, GA 30024
 Toll Free: 800-433-4822 www.mehvac.com

FORM# PUHY-P72TNU-A - 202107

