

Job Name:

System Reference:

Date:



FUNCTIONS

Function (Communicating mode)	PZ-62DR-EA
Fan speed selection	4 fan speeds
Ventilation mode selection	Energy recovery/Bypass/Auto
Night-purge (time)	Any time selectable
Night-purge (fan speed)	Selectable from 4 fan speeds
Dip-switch setting and function setting from RC	Yes
Bypass temp. free setting	Yes
Heater-On temp. free setting	Yes
Fan power up after installation	Yes
0 - 10VDC external input	Yes
ON/OFF timer	Yes
Auto-Off timer	Yes
Weekly timer	Yes
Operation restrictions (ON/OFF, Ventilation mode, fan speed)	Yes
Operation restrictions (Fan speed skip setting)	Yes
Screen contrast adjustment	Yes
Language selection	Yes (11 languages)
Initializing remote controller	Yes
Filter cleaning sign	Yes
Lossnay core cleaning sign	Yes
Error indication	Yes
Error history	Yes
OA/RA/SA temp. display	Yes

SPECIFICATIONS


Power supply requirement	12V DC (Supplied from Lossnay unit)
Power consumption	0.3W
Transmission cable	Non polarized 2-wire (2 (AWG22) sheathed cable)
Total wiring length	219yd (200m) maximum
Number of controllable Lossnay units	15 Lossnay units maximum (Max 2 remote controllers installable)
Environmental condition	Temperature: 32 to 104°F (0 to 40°C) Humidity: 30% to 90% relative humidity (no condensation)
Size	4.75 x 4.75 x 3/4 in (120 x 120 x 19 mm)
Weight	0.55lbs (0.25kg)
Color	Munsell 1.0Y9.2/0.2

- Compatible with Lossnay RVX2 series ERV
- Controls group operation for up to 15 ERV units and 2 RC's in a single group
- Not for use with Lossnay RX5 or RVX series ERV

DIMENSIONS: PZ-62DR-EA

External dimensions of remote controller

Minimum required space around the remote controller

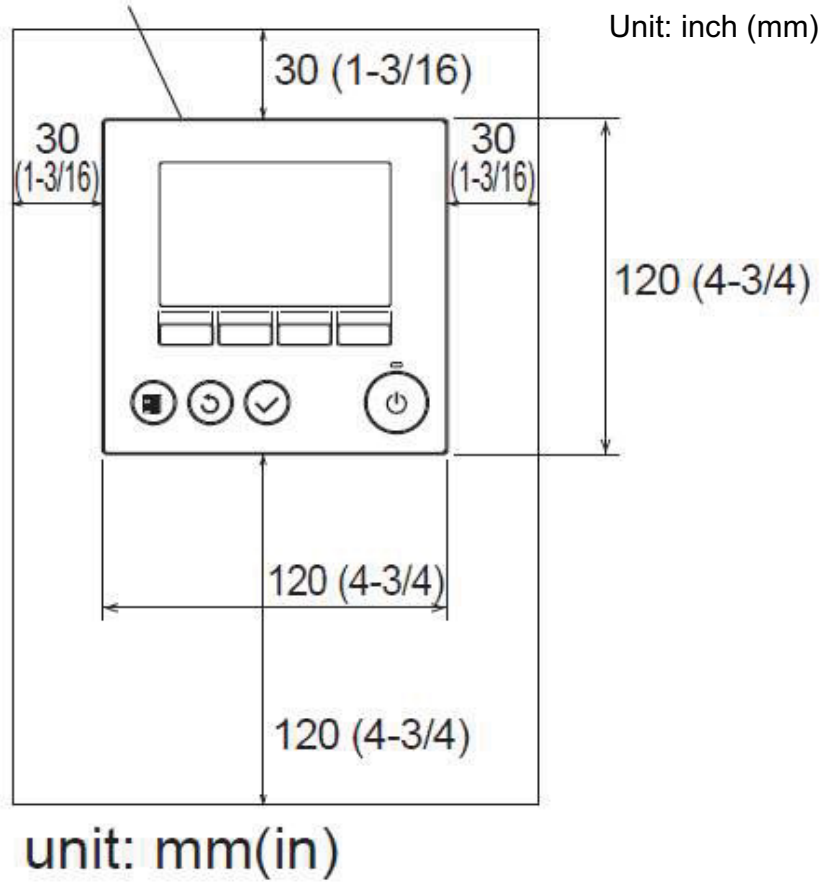

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com