

Job Name:

System Reference:

Date:

208/230V OUTDOOR VRF HEAT RECOVERY SYSTEM**UNIT OPTION**
 Standard Model..... PURY-P72TNU-A
 Seacoast (BS) Model..... PURY-P72TNU-A-BS
ACCESSORIES
 BC Controller (Required)..... for details see BC Controller Submittals
 Joint Kit..... for details see Pipe Accessories Submittal
 Panel Heater Kit..... for details see Panel Heater Kit Submittal
 Snow/Hail Guards Kit..... for details see Snow/Hail Guards Kit Submittal

Specifications		System	
Unit Type		PURY-P72TNU-A(-BS)	
Cooling Capacity (Nominal)		BTU/H	72,000
Heating Capacity (Nominal)		BTU/H	80,000
Guaranteed Operating Range ¹	Cooling ²	°F [°C]	23~126 [-5.0~52.0]
	Heating ³	°F [°C]	-4~60 [-20.0~15.5]
Extended Operating Range	Heating	°F [°C]	-18~60 [-18.0~15.5]
External Dimensions (H x W x D)		In. [mm]	71-5/8 x 36-1/4 x 29-5/32 [1,818 x 920 x 740]
Net Weight		Lbs. [kg]	519 [235]
External Finish			Pre-coated galvanized steel sheet (+powder coating for -BS type) <MUNSELL 5Y 8/1>
Electrical Power Requirements	Voltage, Phase, Hertz, Power Tolerance		208/230V, 3-phase, 60 Hz, ±10%
Minimum Circuit Ampacity		A	24.0/22.0
Maximum Overcurrent Protection		A	40/35
Recommended Fuse Size		A	30/30
Recommended Minimum Wire Size		AWG [mm]	10/10 [5.3/5.3]
SCCR		kA	5
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	5/8 [15.88] Brazed
	Gas (Low Pressure)	In. [mm]	3/4 [19.05] Brazed
Max. Total Refrigerant Line Length		Ft.	1804
Max. Refrigerant Line Length (Between ODU & IDU)		Ft.	541
Max. Control Wiring Length		Ft.	1640
Indoor Unit Connectable	Total Capacity		50.0~150.0% of outdoor unit capacity
	Model/Quantity		P05~P96/1.0~18.0
Sound Pressure Levels		dB(A)	56.5~58.0
Sound Power Levels		dB(A)	75.5/77.0
FAN ⁴	Type x Quantity		Propeller fan x 1
	Airflow Rate	CFM	6000
	External Static Pressure	In. WG	Selectable; 0.00, 0.12, 0.24, 0.32 In. WG; factory set to 0 In. WG
Compressor Operating Range			15.0% to 100.0%
Compressor	Type x Quantity		Inverter scroll hermetic compressor x 1
Refrigerant	Type x Original Charge		R410A x 11 lbs + 7.0 oz [5.2 kg]
Protection Devices	High Pressure Protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter Circuit (Comp./Fan)		Over-heat protection, Over-current protection
	Fan Motor		Over-current protection
AHRI Ratings (Ducted/Non-ducted)	EER		13.1/14.7
	IEER		23.8/29.2
	COP		3.76/4.09
	SCHE		25.9/25.5

NOTES:

Nominal cooling conditions (Test conditions are based on AHRI 1230)
 Indoor: 80°F D.B./67°F W.B. (26.7°C D.B./19.4°C W.B.), Outdoor: 95°F D.B. (35°C D.B.)
 Nominal heating conditions (Test conditions are based on AHRI 1230)
 Indoor: 70°F D.B. (21.1°C D.B.), Outdoor: 47°F D.B./43°F W.B. (8.3°C D.B./6.1°C W.B.)

¹Harsh weather environments may demand performance enhancing equipment. Ask your Mitsubishi Electric representative for more details about your region

²For details on extended cooling operation range down to -10° F DB, see Low Ambient Kit Submittal

³When applying product below -4°F, consult your design engineer for cold climate application best practices, including the use of a backup source for heating

⁴Unit will continue to operate in extended operating range, but capacity is not guaranteed

OUTDOOR UNIT: PURY-P72TNU-A(-BS) – DIMENSIONS

PURY-P72TNU-A(-BS)

Unit: mm(in)


Note 1. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C(248°F).

Connecting pipe specifications

Model	Refrigerant pipe		Service valve	
	High pressure	Low pressure	High pressure	Low pressure
P72	φ15.88(0.625) * 1	φ19.05(3/4) Brazeed * 1	φ22.7(0.9)	φ23.3(0.91)

*1 Connect the refrigerant pipe to the service valve according to the Installation Manual.

NO	Usage	Specifications
①	For pipes	Front through hole 148(5.78) × 84(3.51) Knockout hole
②		Bottom through hole 150(5.91) × 34(1.34) Knockout hole
③		Front through hole φ62.7(2.47) or φ34.5(1.36) Knockout hole
④	For wires	Front through hole φ43.7(1.72) or φ22.7(0.9) Knockout hole
⑤		Bottom through hole φ52.9(2.08) Knockout hole
⑥		Bottom through hole φ22.7(0.9) Knockout hole
⑦	For transmission cables	Front through hole φ34(1.34) Knockout hole
⑧		Bottom through hole φ34(1.34) Knockout hole

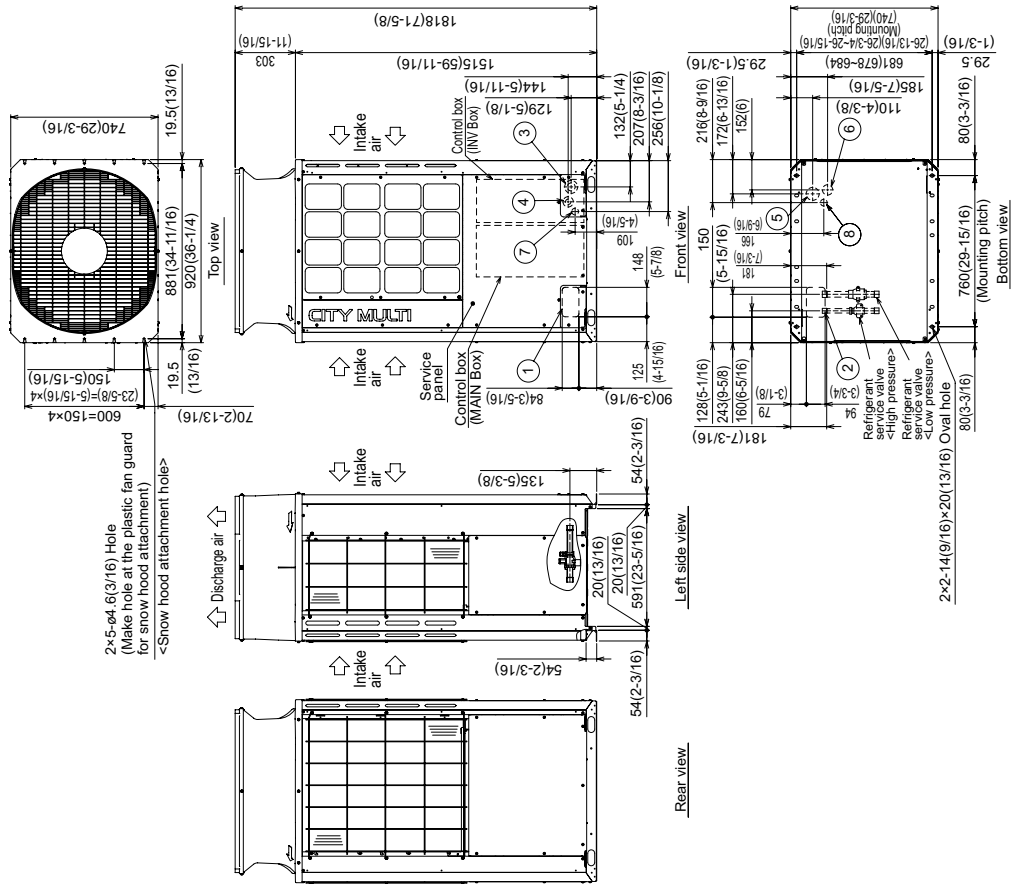

NOTES:
 SEACOAST PROTECTION
 Anti-corrosion Protection: A coating treatment is applied to condenser coil for protection from air contaminants.
 Standard: Salt Spray Test Method - no unusual rust development to 480 hours.
 Sea Coast (BS): Salt Spray Test Method (JRA 9002) - no unusual rust development to 960 hours.

1340 Satellite Boulevard Suwanee, GA 30024
 Toll Free: 800-433-4822 www.mehvac.com

FORM# PURY-P72TNU-A - 202107

